
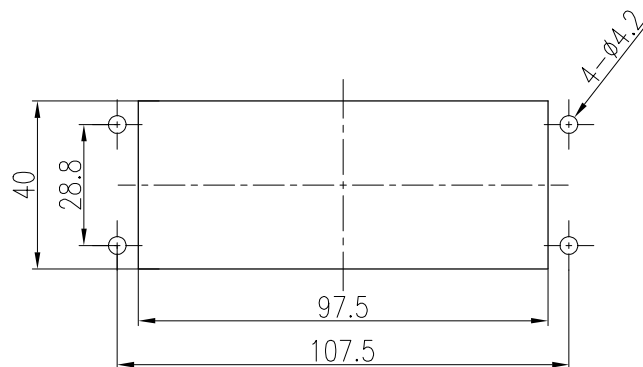


浮动公差: ± 2
Floting tolerance: ± 2

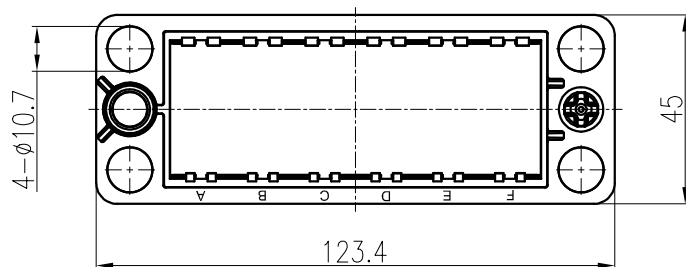


开孔尺寸图
(Paenl cut out)

技术参数:

- 模块数量: 6
- 材料: 聚碳酸酯
- 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 可插拔次数: ≥ 500
- 浮动公差: $\pm 2\text{mm}$
- 锁定公差: $\pm 4\text{mm}$

Technical specification:

- No. of module: 6
- Material: polycarbonate
- Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Mating cycles: ≥ 500
- Floating Tolerance: $\pm 2\text{mm}$
- Locking range: $\pm 4\text{mm}$

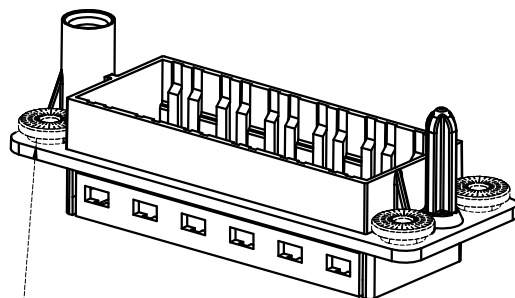

1980020010003 HF-ADK-D15

						表面处理 Finish		—		图号 Drawing No.	—
						材料 Material		—		产品代号 Part Code	HF24B.P—FADK
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date			产品料号 Part No.		1110241001500
绘图 Drawn 审核 Checked 工艺 Process	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—
	SY JI	07.02.2023	标准化 Stand.	—	—	2:3	V1.1	25.7g	—	 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	
	HZ LAN	07.02.2023									
	—	—	批准 Approved	HQ ZHANG	07.02.2023			All Dimensions in mm Original Size DIN A 4			