
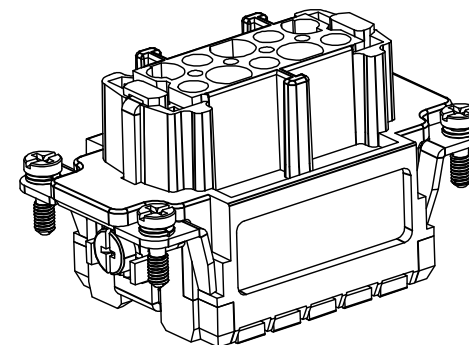
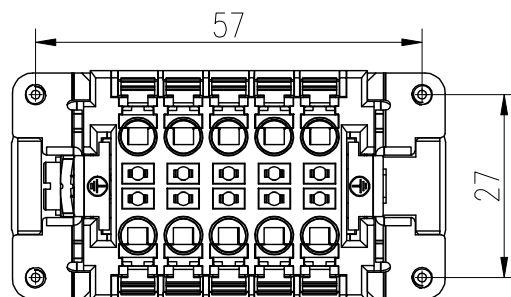
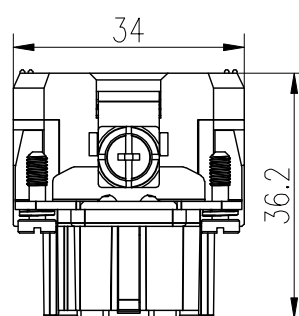
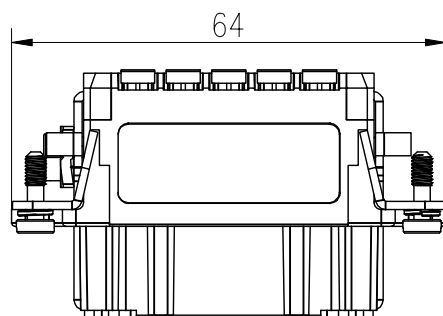


选配件/Apolegamy

产品代号/Part Code	产品料号/Part No.	备注/Remark
HEB/P-1T2	1980020070027	横向2Pin短接/Horizontal 2Pin short circuit
HEB/P-1T3	1980020070028	横向3Pin短接/Horizontal 3Pin short circuit
HEB/P-2T1	1980020070029	纵向2Pin短接/Longitudinal 2Pin short circuit

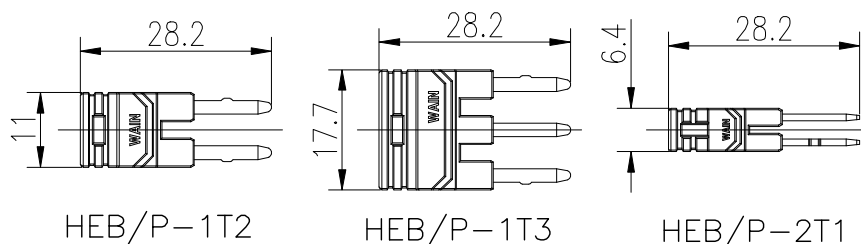

技术参数:

插芯:

- 插针数: 10+PE
- 额定电流: 16A
- 额定电压: 500V
- 额定脉冲电压: 6kV
- 污染等级: 3
- 依据UL/CSA的额定电压: 600V
- 绝缘阻抗: $\geq 10^{10}\Omega$
- 材料: 聚碳酸酯
- 颜色: RAL 7032 (浅灰色)
- 温度范围: -40°C - $+125^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数: ≥ 500
- 可实现短接功能 (选配)

插针:

- 接线方式: 弹片连接
- 材料: 铜合金
- 表面处理: 镀银
- 接触电阻: $\leq 3\text{m}\Omega$
- 线径范围: $0.5\text{-}4\text{mm}^2$ (20-12 AWG)
- (带管形接线端子线径范围: $0.14\text{-}2.5\text{mm}^2$ 26-14 AWG)
- 剥线长度: $9\frac{1}{2}\text{mm}$

Technical specification:

Insiera:

- No. of contact: 10+PE
- Rated current: 16A
- Rated voltage: 500V
- Rated impulse voltage: 6kV
- Pollution degree: 3
- Rated voltage acc.to UL/CSA: 600V
- Insulation resistance: $\geq 10^{10}\Omega$
- Material: polycarbonate
- Colour: RAL 7032(light grey)
- Temperature range: -40°C - $+125^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles: ≥ 500
- Can realize short circuit function (optional)

Contacts:

- Terminal: spring terminal
- Material: copper alloy
- Surface: hard-silver plated
- Contact resistance: $\leq 3\text{m}\Omega$
- Wire gauge: $0.5\text{-}4\text{mm}^2$ (20-12 AWG)
- (For wires with crimped female, wire gauge: $0.14\text{-}2.5\text{mm}^2$ 26-14 AWG)
- Stripping length: $9\frac{1}{2}\text{mm}$

						表面处理 Finish		图号 Drawing No.	
						材料 Material		DW2022083-110	
标记 Mark		变更描述/Description		签名 Signature		比例 Scale		产品代号 Part Code	
姓名/Name		日期/Date		姓名/Name		版本 REV.		HE-010-FQ P	
ZY YE		2023-2-3		—		01		产品料号 Part No.	
HZ LAN		2023-2-3				61.13g		1220000990503	
—		—		批准 Approved		1:1		产品名称 Part Name	
				HQ ZHANG		All Dimensions in mm Original Size DIN A 4		HE-010-FQ P,成品	
								厦门唯恩电气有限公司 XIAMEN WAN ELECTRICAL CO.LTD	