

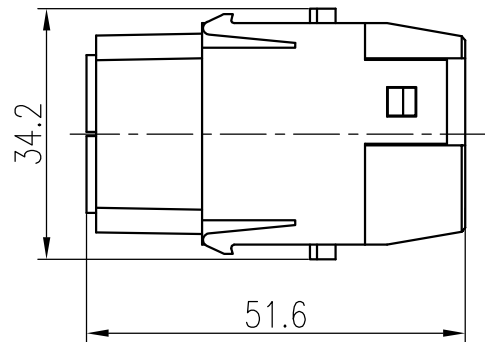


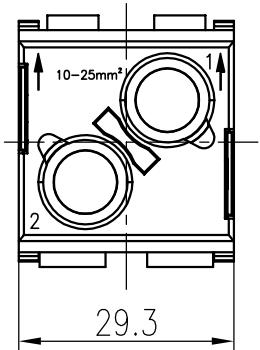

- 技术参数:
插芯:
 - 插针数: 2
 - 额定电流: 100A
 - 额定电压: 1000V
 - 额定脉冲电压: 8kV
 - 污染等级: 3
 - 依据UL的额定电压: 600V
 - 绝缘阻抗: $>10^{10}\Omega$
 - 材料: 聚碳酸酯
 - 颜色: RAL 7032 (浅灰色)
 - 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
 - 依据UL 94的阻燃等级: V0
 - 可插拔次数: >500插针:
 - 接线方式: 轴向螺栓连接
 - 材料: 铜合金
 - 表面处理: 镀银
 - 接触电阻: $\leq 0.3\text{m}\Omega$
 - 线径范围: 10-25mm²
 - 内角扳手: SW-4*100
 - 剥线长度: 13mm
 - 拧紧力矩:
 - mm²: 10 16 25 35
 - N·m: 6 6 7 8
- Technical specification:
Insters:
 - No. of contact: 2
 - Rated current: 100A
 - Rated voltage: 1000V
 - Rated impulse voltage: 8kV
 - Pollution degree: 3
 - Rated voltage acc.to UL: 600V
 - Insulation resistance: $\geq 10^{10}\Omega$
 - Material: polycarbonate
 - Colour: RAL 7032(light grey)
 - Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
 - Flammability acc.to UL 94: V0
 - Mating cycles: ≥ 500Contacts:
 - Terminal: axial screw terminal
 - Material: copper alloy
 - Surface: hard-silver plated
 - Contact resistance: $\leq 0.3\text{m}\Omega$
 - Wire gauge: 16-35mm²
 - Hexagonal driver: SW-4*100
 - Stripping length: 13mm
 - Tightening tourque:
 - mm²: 10 16 25 35
 - N·m: 6 6 7 8

						表面处理 Finish	—			图号 Drawing No.	—
						材料 Material	—			产品代号 Part Code	H2MK-002.1-F
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date				产品料号 Part No.	1290020210101
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—
绘图 Drawn	YL GAO	18.05.2023	标准化 Stand.	—	—	1:1	V1.1	71.3g	—		
审核 Checked	Q GAO	18.05.2023									
工艺 Process	—	—	批准 Approved	HQ ZHANG	18.05.2023			All Dimensions in mm Original Size DIN A 4			厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD